



PL-L

16.5PL-L/COR/22-835/IF22/P/4P/DIM 10/1

Philips InstantFit LED lamps make the transition to LED from CFL lamps as simple as replacing a lamp. With a wide array of color temperatures, the InstantFit LED lamps can quickly and effectively replace compact fluorescent lamps.

Product data

General Information	
Cap-Base	2G11
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	835 [CCT of 3500K]
Beam Angle (Nom)	160 degree(s)
Luminous Flux	2,200 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	133.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	40000-160000 Hz
Input Frequency	40000-160000 Hz
Power Consumption	16.5 W
Lamp Current (Max)	400 mA
Lamp Current (Min)	200 mA

Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	70-110 V
UL Type	UL Type A


Temperature	
Ambient temperature range	-4 °F to 113 °F
T-Case Maximum (Nom)	167 °F

Controls and Dimming	
Dimmable	Only with specific dimmers


Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	22-7/8 inch
Bulb Shape	PL-L

Approval and Application	
Energy Saving Product	Yes
Approval Marks	UL certificate RoHS compliance DLC compliance


Lifetime

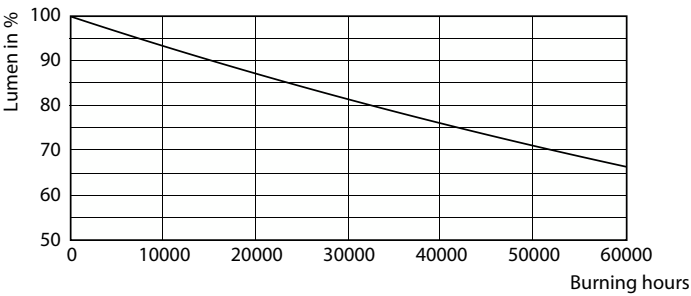


Lumen Maintenance Diagram - 16.5PL-L/COR/22-835/IF22/P/4P/DIM 10/1

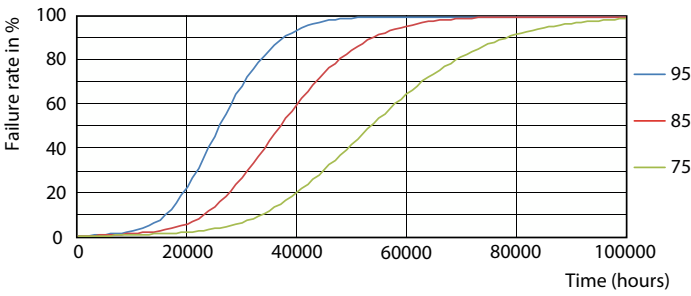


Life Expectancy Diagram - 16.5PL-L/COR/22-835/IF22/P/4P/DIM 10/1

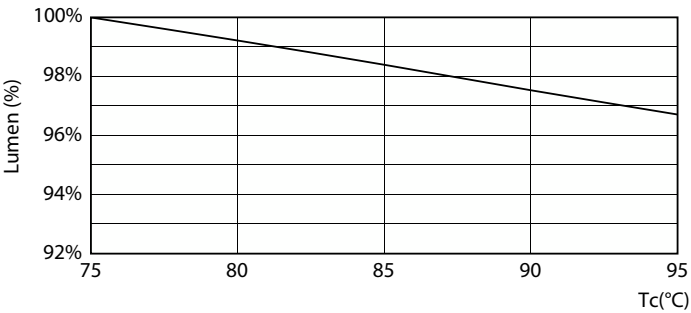

Lumen Maintenance Diagram - 16.5PL-L/COR/22-835/IF22/P/4P/DIM 10/1

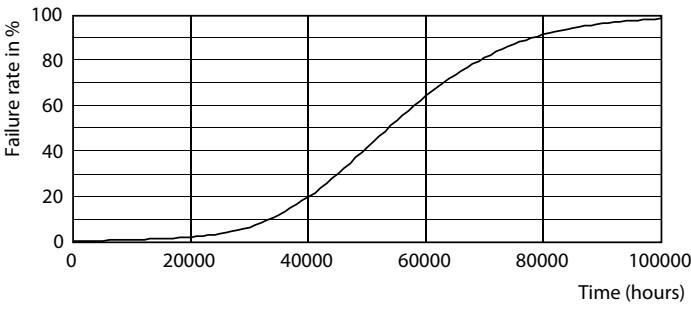

Life Expectancy Diagram - 16.5PL-L/COR/22-835/IF22/P/4P/DIM 10/1

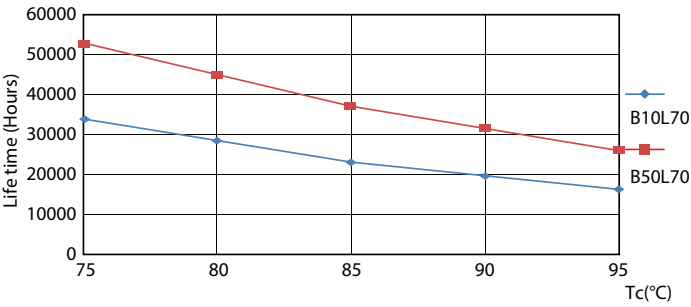

Life Expectancy Diagram - 16.5PL-L/COR/22-835/IF22/P/4P/DIM 10/1

